


Comparison of performance on 1/4" (6mm) thick clear glass.

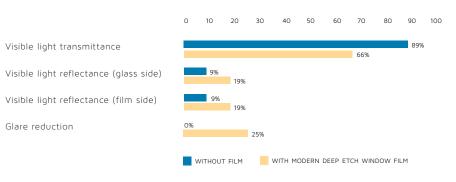

Privacy factor (1-5)

Modern Deep Etch

Notes

- Performance results are calculated using NFRC methodology and LBNL Window software, and are subject to variations within industry standards and only intended for estimating purposes. This data is provided for informational purposes only and are subject to normal manufacturing variances.
- 2. For full details and additional information please visit www.solargard.com/byDESIGN

Performance results	1/4" (6mm)
Visible light	
% Transmittance	66
% Reflectance (glass side)	19
% Reflectance (film side)	19
% Glare reduction	25
Solar heat gain coefficient	.65

Physical properties

Gauge	3.0 mil (75 micron)
Туре	Vinyl
Adhesive	Clear, pressure-sensitive
5	4.5 11/27.5 1
Release liner	1.5 mil (37.5 micron)
D-i ft (1 F)	F
Privacy factor (1-5)	5

SK0314BDMDE 5/20
© 2020, Saint-Gobain High Performance Solutions and/or its affiliates • All Rights Reserved
WWW.solargard.com/byDESIGN

