


Comparison of performance on 1/4" (6mm) thick clear glass.



Privacy factor (1-5)

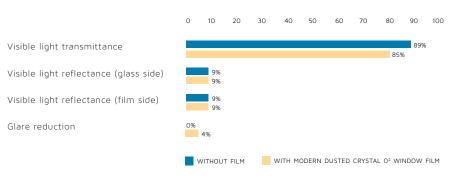

2

3



Most private



Modern Dusted Crystal O²

Notes

- Performance results are calculated using NFRC methodology and LBML Window software, and are subject to variations within industry standards and only intended for estimating purposes. This data is provided for informational purposes only and are subject to normal manufacturing variances.
- For full details and additional information please visit www.solargard.com/byDESIGN

Performance results	1/4" (6mm
Visible light	
% Transmittance	85
% Reflectance (glass side)	9
% Reflectance (film side)	9
% Glare reduction	4
Solar heat gain coefficient	.79

Physical properties

Gauge	3.0 mil (75 micron)
Туре	Polyester
Adhesive	Clear, pressure-sensitive
Release liner	3.0 mil (75 micron)
Privacy factor (1-5)	5

SK0314BDMDC02 5/20
© 2020, Saint-Gobain High Performance Solutions and/or its affiliates • All Rights Reserved
www.solargard.com/byDESIGN

